



SAW Components

Datasheet B9003

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are rendered in a white, glowing, sans-serif font, appearing to be part of a larger, curved structure that resembles the company's logo symbol. The background is dark and textured, with a faint map of the world visible.



SAW Components

B9003

Low-Loss Filter for Mobile Communication

836,5 MHz

Datasheet




Chip sized SAW package DCS4G

Features

- Low-loss RF filter for Cell mobile telephone system, transmit path
- High counterband suppression
- Usable passband 25 MHz
- Unbalanced/unbalanced operation
- Package size: 1.6 mm x 2.0 mm (4 pin, diagonal pinning)

Terminals


- Ni, gold-plated

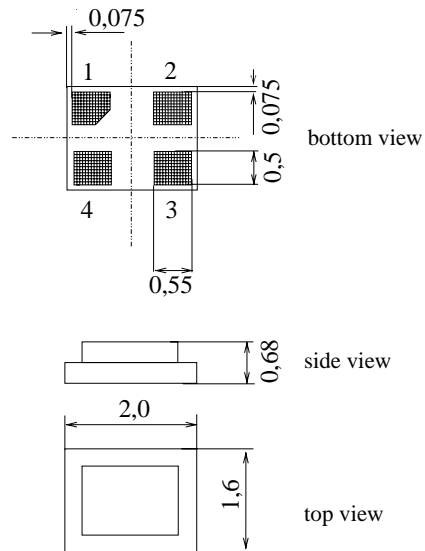

Dimensions in mm, approx weight 0,007g

Pin configuration

- 1 Input
- 3 Output
- 2,4 Ground

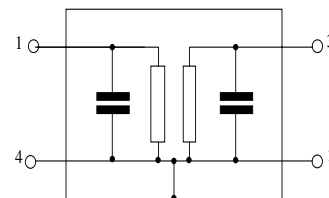

Type	Ordering code	Marking and Package according to	Packing according to
B9003	B39841-B9003-E910	C61157-A7-A105	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 /+ 85	°C	machine model, 10 pulses
Storage temperature range	T_{stg}	- 40 /+ 85	°C	
DC voltage	V_{DC}	3	V	
ESD voltage	V_{ESD}^*	100*	V	
Source Power max.				source impedance 50 Ω
824 - 849 MHz	P_{IN}	16	dBm	
elsewhere	P_{IN}	10	dBm	source impedance 50 Ω

* acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9003

Low-Loss Filter for Mobile Communication

836,5 MHz

Datasheet



Characteristics

Operating temperature range: $T = +25\text{ °C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	836,5	—	MHz
Maximum insertion attenuation	α_{\max}				
	824,0 ... 849,0 MHz	—	1,9	2,1	dB
Ripple	p-p				
	824,0 ... 849,0 MHz	—	0,9	1,1	dB
Input return loss @ 50 Ohm					
	824,0 ... 849,0 MHz	10	12	---	dB
Output return loss @ 50 Ohm					
	824,0 ... 849,0 MHz	10	12	---	dB
Attenuation	α				
	0,0 ... 779,0 MHz	33	36	—	dB
	779,0 ... 804,0 MHz	38	43	—	dB
	869,0 ... 894,0 MHz	40	43	—	dB
	894,0 ... 1580,0 MHz	33	37	—	dB
	1580,0 ... 1698,0 MHz	33	44	—	dB
	1698,0 ... 2547,0 MHz	30	37	—	dB



SAW Components

B9003

Low-Loss Filter for Mobile Communication

836,5 MHz

Datasheet





Characteristics

Operating temperature range: $T = -30$ to $+85$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	836,5	—	MHz
Maximum insertion attenuation	α_{max}				
	824,0 ... 849,0 MHz	—	2,2	2,5	dB
Ripple	p-p				
	824,0 ... 849,0 MHz	—	1,1	1,5	dB
Input return loss @ 50 Ohm					
	824,0 ... 849,0 MHz	10	11,5	---	dB
Output return loss @ 50 Ohm					
	824,0 ... 849,0 MHz	10	11,5	---	dB
Attenuation	α				
	0,0 ... 779,0 MHz	33	36	—	dB
	779,0 ... 804,0 MHz	38	43	—	dB
	869,0 ... 894,0 MHz	40	43	—	dB
	894,0 ... 1580,0 MHz	33	37	—	dB
	1580,0 ... 1698,0 MHz	33	44	—	dB
	1698,0 ... 2547,0 MHz	30	37	—	dB





Transfer function

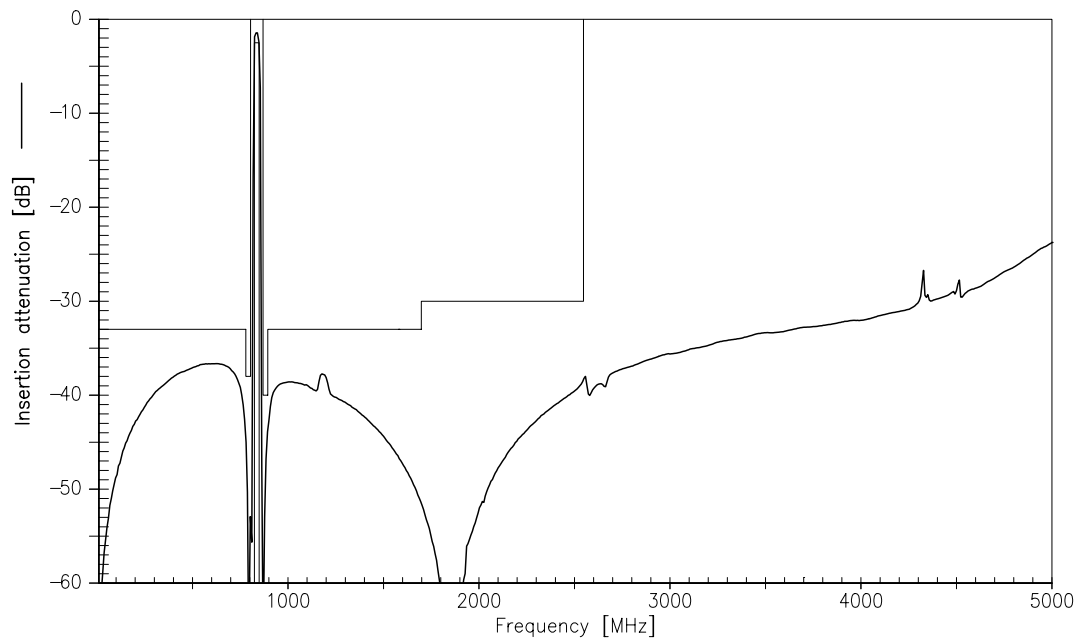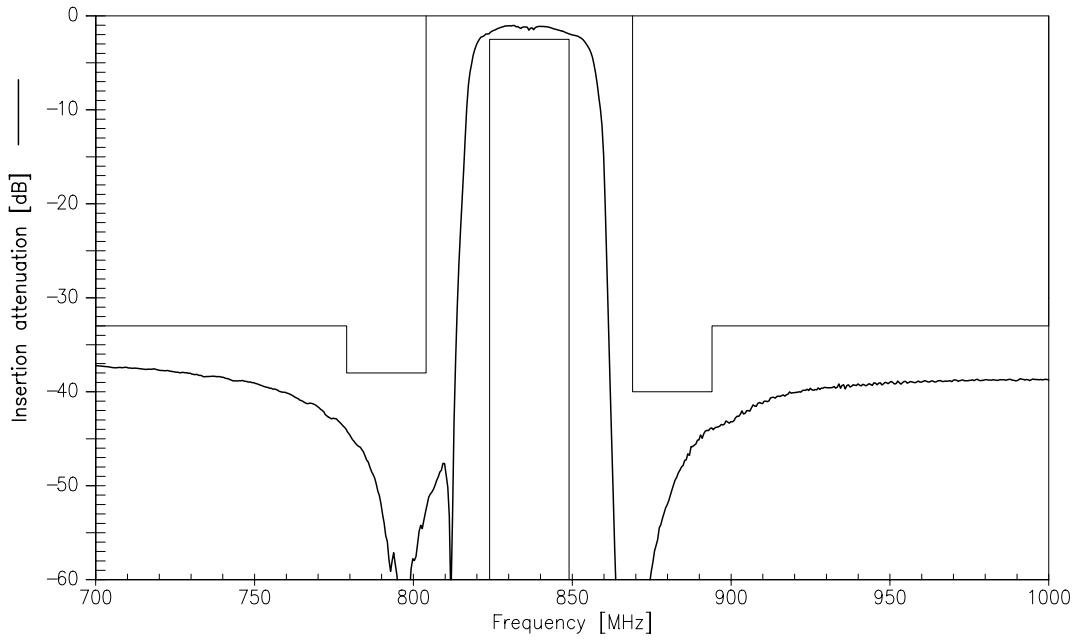



Input and Output Return Loss

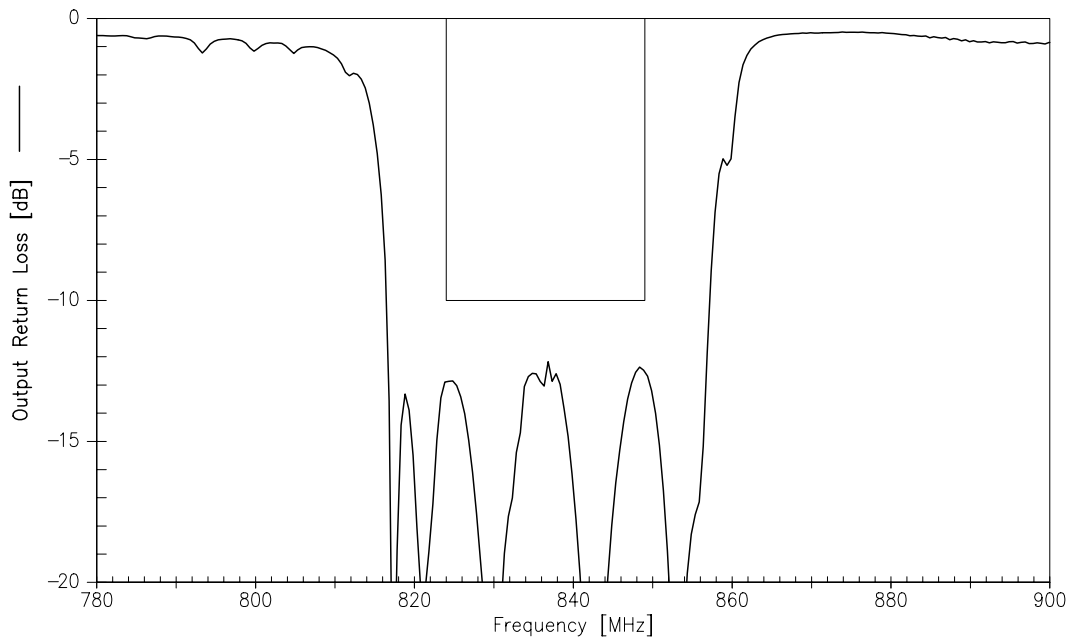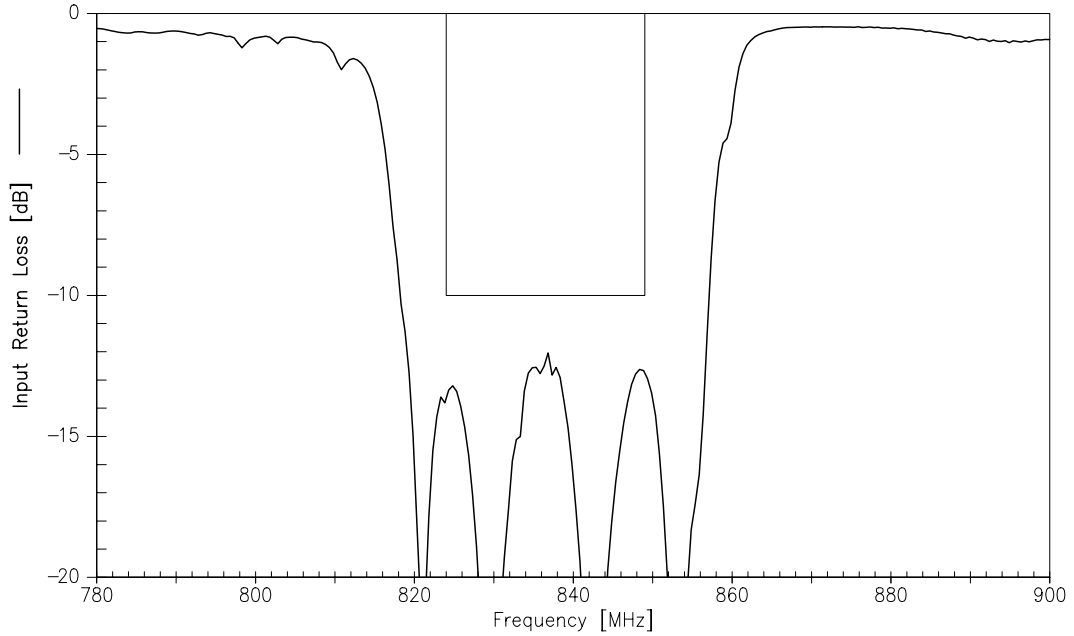



SAW Components

B9003

Low-Loss Filter for Mobile Communication

836,5 MHz

Datasheet



Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2004. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.